

Motor

Adopted the NEMA standard

Power:0.55~2.2kW(Single phase)

Insulation class:B&F



Maximum well diameter: Φ 95mm

Equip with start control box or digital auto-control box

Power:0.55~7.5kW(Three phase)

Protection grade:IP 68

Highest temperature of liquid:35°C

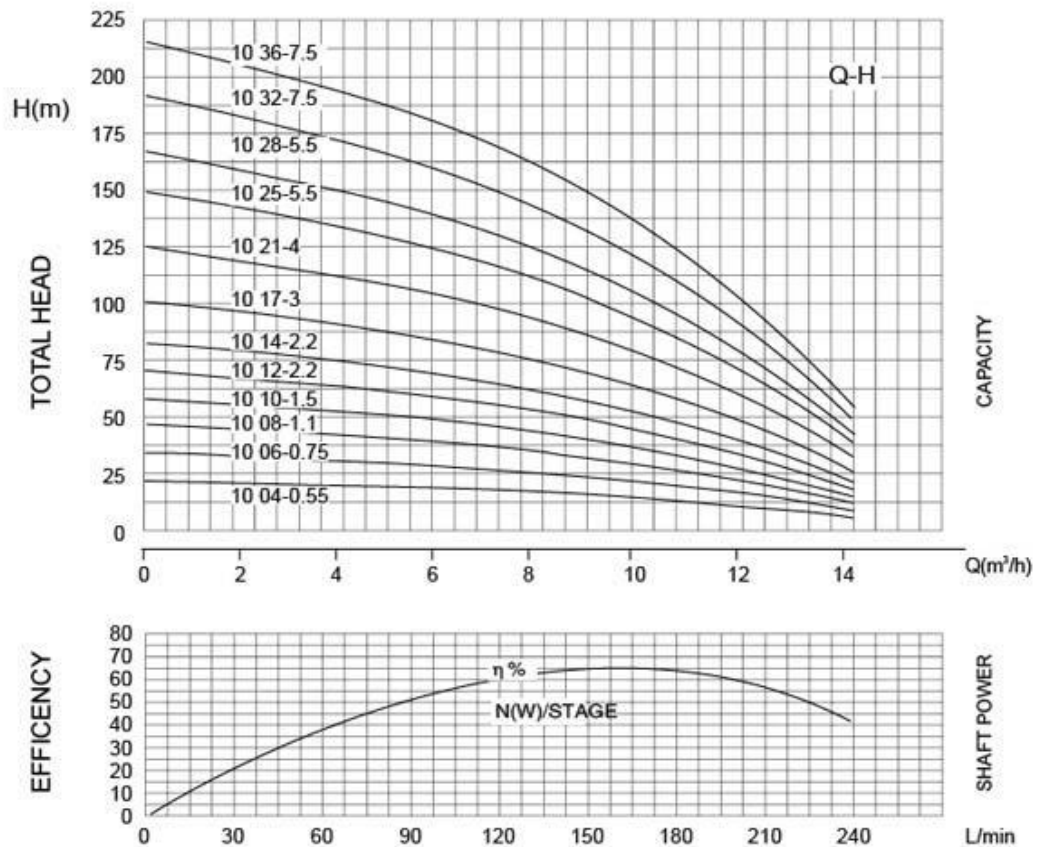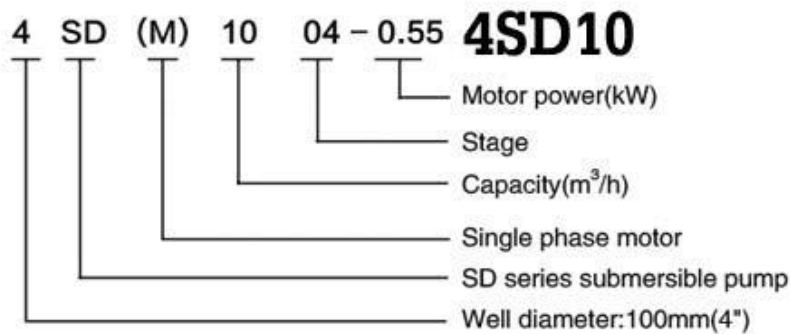

PERFORMANCE TABLE :

rpm : 2850

Type		Motor power		Capacity and head									
Single phase 220-240V 50Hz	Three phase 220-240V 50Hz	KW	HP	l/min	0	30	60	90	120	150	180	210	240
				m ³ /h	0	1.8	3.6	5.4	7.2	9.0	10.8	12.6	14.4
4SDM10 10-1.5	4SD10 10-1.5	1.5	2	Head(m)	60	57	54	51	47	41	34	25	14